
\*.DGN FILE NAME PM-6

# 31.0 m / LANE LINE


ONLY





\* SEE NOTE NO. 5

### 46.0 m / LANE LINE



62.0 m / LANE LINE

ONLY

CENTER LINE OR ISLAND

TYPICAL:

EDGELINE, CURB LINE OR LANE LINE

25.0


25.0

ONLY


ONLY

### 76.0 m / LANE LINE

16.0



### 92.0 m / LANE LINE

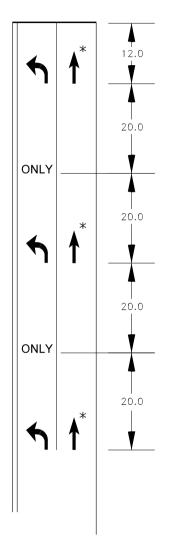


ALL DIMENSIONS SHOWN ARE IN MILLIMETERS OR METERS

NUMBERS INDICATE METERS UNLESS OTHERWISE NOTED.

WHOLE NUMBERS INDICATE MILLIMETERS; DECIMAL

108.0 m / LANE LINE

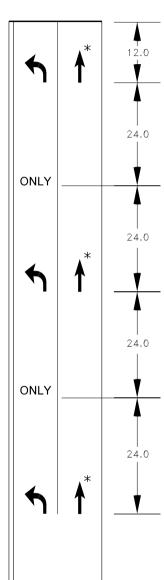

## GENERAL NOTES

- 1. WORDS AND SYMBOLS SHALL BE CENTERED LATERALLY WITHIN THE LANE. THE LONGITUDINAL DIMENSION SHALL BE PARALLEL TO THE LANE.
- 2. LONGITUDINAL SPACING BETWEEN SUCCESSIVE WORDS AND/OR SYMBOLS IN TURN LANES SHOULD BE AT LEAST 4 TIMES AND NO GREATER THAN 10 TIMES THE HEIGHT OF THE LARGEST CHARACTER.
- 3. THE STOP LINE MAY NOT BE PRESENT.
- 4. SEE WORDS AND SYMBOLS, PM-10A, FOR WORDS AND SYMBOL DETAILS.
- 5. STRAIGHT THRU ARROWS ARE OPTIONAL. SEE THE PAVEMENT MARKING PLANS FOR THE APPROPRIATE LAYOUT.

WORD AND SYMBOL LANE LAYOUT

PAVEMENT MARKING STANDARD STANDARD

STANDARD PLANS METRIC

STANDARD

NO. PM-6 REVISION DATE

\*.DGN FILE NAME PM-6

STATE OF NEW HAMPSHIRE DEPARTMENT OF TRANSPORTATION, CONCORD, N.H.

NO. PM-6